


# Self-Drilling Drywall Anchors



## Description

The Self-Drilling Drywall Anchor is a one piece light-duty anchor designed for fast installation into wallboard/drywall. They are available in both nylon and zamac alloy.

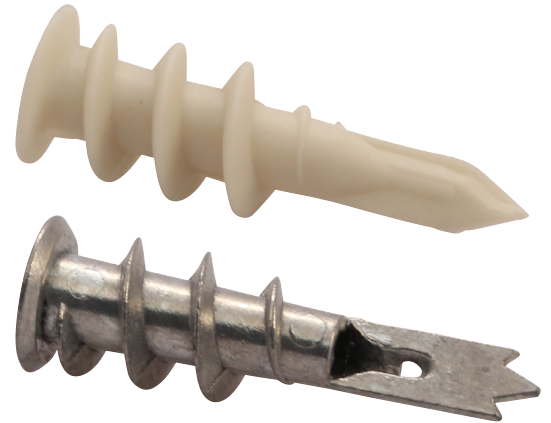

## Key Features & Benefits

- ▶ No pre-drill necessary
- ▶ Pre-assembled one piece design
- ▶ Installed flush against the wall
- ▶ Easy installation and removal using only a Philips screw driver

## Specifications, Listings and Approvals

**Mating Screw Size:** #6 or #8

**Material:**

- Injection-molded nylon
- Zamac alloy

## Applications

- ▶ Electrical Fixtures
- ▶ Mirrors
- ▶ Picture Frames
- ▶ Light to Medium duty applications

## Installation Information

### Instructions

1. Insert the Philips driver bit (#2 or #3) into the head of the anchor.
2. Apply pressure towards the drywall and turn the anchor clockwise until it is flush with the wall.
3. Place fixture over the installed anchor, insert screw and fasten until secure. Do not over tighten.

**NOTE: Always wear safety glasses.** Normal safety precautions should be observed when drilling the holes to avoid electrical installations, other utilities and reinforcement bars.

## Installation Data

Anchor Size	Screw Size	Grip Range (in.)	Min. Screw Engagement (in.)
#6	#6	3/8" - 5/8"	3/4
#8	#8	3/8" - 1"	3/4

## Performance Data

### Allowable Loads (lbs.) – Drywall

Anchor	3/8" Drywall		1/2" Drywall		5/8" Drywall		3/4" Drywall	
	Tension	Shear	Tension	Shear	Tension	Shear	Tension	Shear
#6	10	15	15	15	20	20	20	20
#8	15	15	15	20	20	25	20	25

\*Allowable load capacities are calculated using an applied safety factor of 4:1

### Ultimate Loads (lbs.) – Drywall

Anchor	3/8" Drywall		1/2" Drywall		5/8" Drywall		3/4" Drywall	
	Tension	Shear	Tension	Shear	Tension	Shear	Tension	Shear
#6	40	60	60	60	80	80	80	80
#8	60	60	60	80	80	100	80	100

\*Allowable load capacities are calculated using an applied safety factor of 4:1

**Order Information****Self-Drilling Drywall Anchors: Nylon**

Catalog No.	Wall Thickness	Mating Screw Size	Quantity Box	Quantity Case
DWAN6	3/8" - 5/8"	#6	100	1000
DWAN8	3/8" - 1"	#8	100	1000

**Self-Drilling Drywall Anchors: Zinc-Coated Zamac Alloy**

Catalog No.	Wall Thickness	Mating Screw Size	Quantity Box	Quantity Case
DWAS6	3/8" - 5/8"	#6	100	1000
DWAS8	3/8" - 1"	#8	100	1000

For more information, please contact:

**TOGGLER**  
HIGH-PERFORMANCE ANCHORS®

**wej-it**  
HIGH-PERFORMANCE ANCHORS

**Divisions of Mechanical Plastics Corp.**

110 Richards Avenue • Norwalk, CT 06854

**Phone: 203-857-2200**

**Fax: 203-857-2201 • E-mail: [sales@wej-it.com](mailto:sales@wej-it.com)**

**[www.togglers.com](http://www.togglers.com) • [www.wej-it.com](http://www.wej-it.com)**

TOGGLER logo and typface, Wej-It® and High-Performance Anchors® are trademarks of Mechanical Plastics Corp. ©2014 Mechanical Plastics Corp. Rev. 8/15